

AIR OPERATED DOUBLE DIAPHRAGM PUMPS




PORT SIZE & TYPE	MAXIMUM FLOW	MAXIMUM PRESSURE	FLUID CHAMBERS & MANIFOLD MATERIALS	FLUID INLET/ OUTLET CONNECTIONS	MAXIMUM SOLIDS SIZE	MAXIMUM SUCTION LIFT
1/2" (UP05)	54 l/min (14,3 gal/min)	8 bar (120 psi)	Aluminum 316 Stainless Steel	1/2" BSP (F) or NPT (F) Threaded	3/32" (2,5 mm)	5 m Dry (16 ft) 8 m Wet (26 ft)
1" (UP10)	200 l/min (53 gal/min)	8 bar (120 psi)	Aluminum 316 Stainless Steel	1" BSP (F) or NPT (F) Threaded	1/4" (6,4 mm)	5 m Dry (16 ft) 8 m Wet (26 ft)
2" (UP20)	650 l/min (172 gal/min)	8 bar (120 psi)	Aluminum, 316 Stainless Steel, Ductile Iron	2" BSP (F) or NPT (F) Threaded 2" ANSI/DIN Flange	1/4" (6,4 mm)	5 m Dry (16 ft) 8 m Wet (26 ft)
3" (UP30)	1.000 l/min (264 gal/min)	8 bar (120 psi)	Aluminum 316 Stainless Steel	3" BSP (F) or NPT (F) Threaded 3" ANSI/DIN Flange	1/2" (12,7 mm)	6 m Dry (19.7 ft) 8 m Wet (26.3 ft)

PORT SIZE & TYPE	MAXIMUM FLOW	MAXIMUM PRESSURE	FLUID CHAMBERS & MANIFOLD MATERIALS	FLUID INLET/ OUTLET CONNECTIONS	MAXIMUM SOLIDS SIZE	MAXIMUM SUCTION LIFT
3/8" (UP03)	31 l/min (8,2 gal/min)	7 bar (100 psi)	Polypropylene, Conductive Acetal, PVDF, Conductive Polypropylene	3/8" BSP (F) or NPT (F) Threaded	1,6 mm (1/16")	3 m Dry (10 ft) 7 m Wet (23 ft)
1/2" (UP05)	51 l/min (13,5 gal/min)	7 bar (100 psi)	Polypropylene, Conductive Acetal, PVDF, Conductive Polypropylene	1/2" BSP (F) or NPT (F) Threaded	2,5 mm (3/32")	5 m Dry (16 ft) 8 m Wet (26 ft)
1" (UP10)	200 l/min (53 gal/min)	7 bar (100 psi)	Polypropylene, PVDF, Conductive Polypropylene	1" BSP (F) or NPT (F) Threaded 1" ANSI/DIN Flange (Central or Lateral)	6,4 mm (1/4")	5 m Dry (16 ft) 8 m Wet (26 ft)
2" (UP20)	650 l/min (172 gal/min)	7 bar (100 psi)	Polypropylene, PVDF, Conductive Polypropylene	2" ANSI/DIN Lateral Flange	6,4 mm (1/4")	5 m Dry (16 ft) 8 m Wet (26 ft)

*Maximum free delivery and displacement per cycle may vary depending on the fluid pumped, the pressure loss and the diaphragms material.
Diaphragms are available in Buna-N (NBR), Santoprene®, Hytrel®, PTFE and FKM.
Valve Balls are available in Buna-N (NBR), Santoprene®, Hytrel®, PTFE, FKM and Stainless Steel.
Valve Seat are available in Buna-N (NBR), Santoprene®, Hytrel®, PTFE, FKM, Aluminium, Stainless Steel and Polypropylene.

AIR OPERATED DOUBLE DIAPHRAGM PUMPS

FOR THE OIL & GAS INDUSTRY

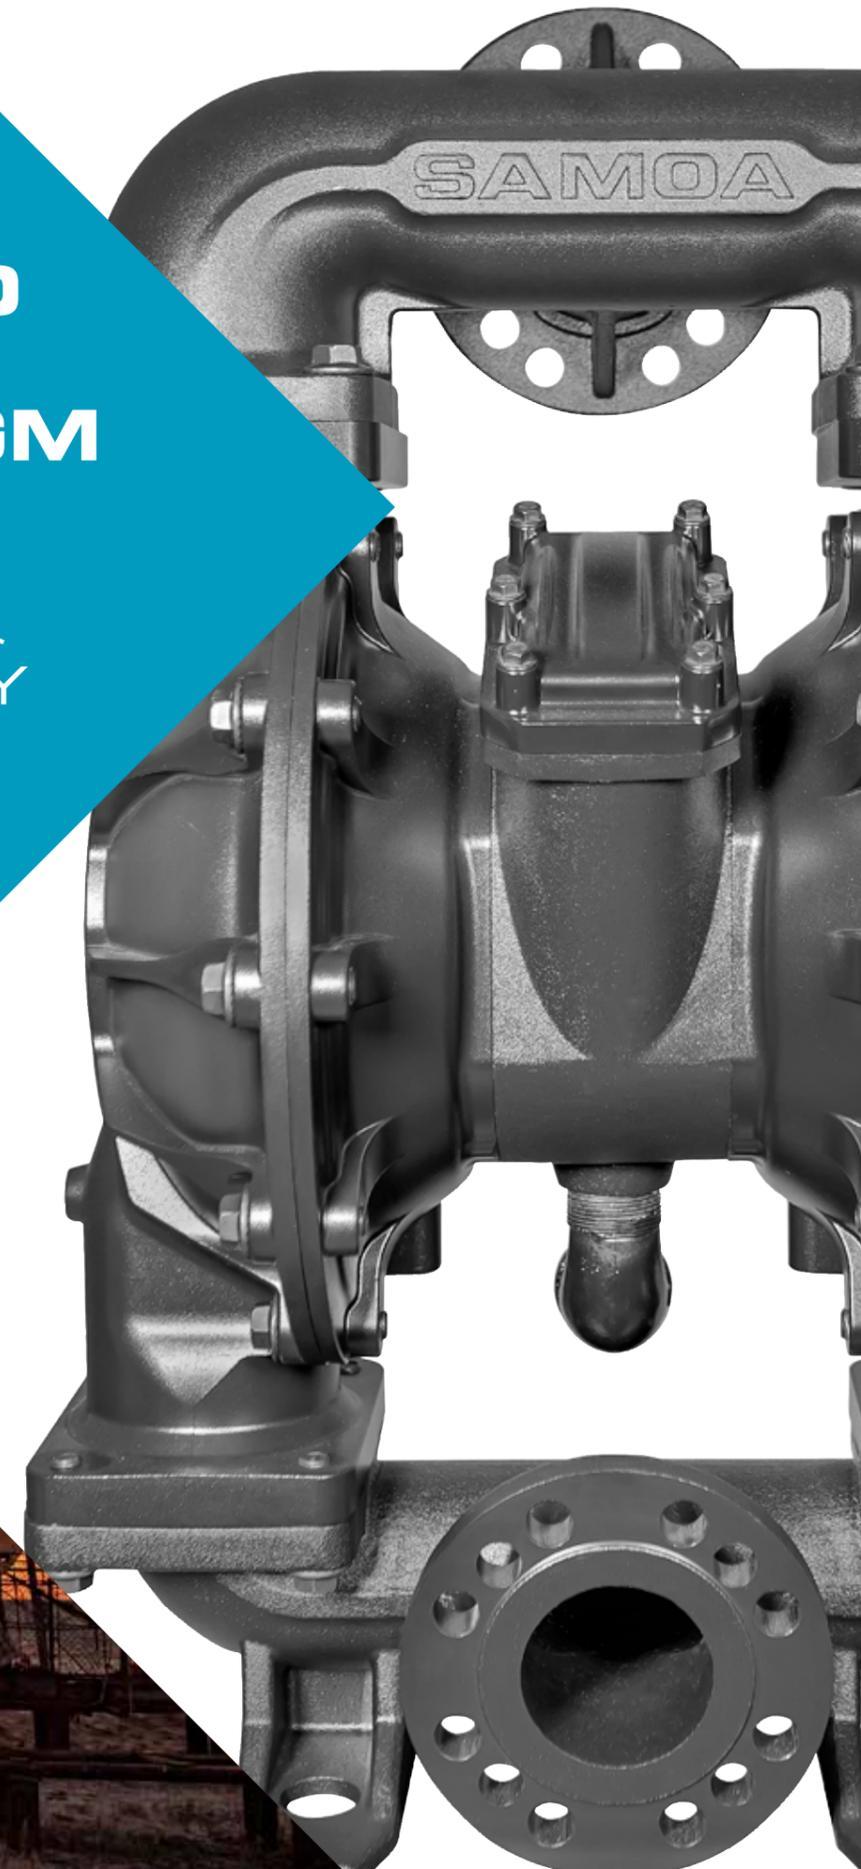

CONTACT US TODAY!
Visit www.samoaindustrial.com for more information.

SAMOA INDUSTRIAL, S.A. - HEADQUARTERS
SPAIN AND EXPORT MARKETS
POL. IND. PORCEYO, I-14 - CAMINO DEL FONTÁN, 831
E-33392 GIJÓN (ASTURIAS), SPAIN
TEL.: +34 985 381 488 - FAX: +34 985 147 213

SAMOA LTD.
UNITED KINGDOM AND REP. OF IRELAND



SAMOA S.A.R.L.
FRANCE

SAMOA FLOWTECH GMBH
GERMANY AND AUSTRIA

SAMOA CORPORATION
NORTH AMERICA

©Copyright, SAMOA INDUSTRIAL, S.A.

SAMOA Industrial, S.A. is an ISO 9001, ISO 14001 and ISO 45001 certified company.



AIR OPERATED DOUBLE DIAPHRAGM PUMPS

Air Operated Double Diaphragm pumps are very versatile pumps, suitable for a wide variety of applications. Their simple design and various material configuration options make them capable to many applications.

Why choose an AODD pump in the Oil & Gas industry?

- Dry running capability.
- Can pump clean fluids or with suspended solids.
- Best pump for corrosive, abrasive, and shear sensitive fluids.
- On-demand operation, the pump starts and stops automatically when the fluid outlet is open or closed.
- Adjustable flow and discharge pressure with only one air pressure regulator.
- Intrinsically safe: No electrical requirements or hazards.



Why choose SAMOA PIVOT SERIES Diaphragm Pumps?

HIGHER EFFICIENCY: Maximum fluid flow with reduced air consumption, versus competitive pumps.

INCREASED RELIABILITY: No stall, no icing, and reliable start-up even with the lowest air pressure.

MINIMAL VIBRATION AND PULSATION: Thanks to the fast action Frictionless Pivot air valve.

BOLTED CONSTRUCTION: Provides better seal and eliminates pump leaks. Same size bolts in covers and manifolds for easier maintenance.

EASIER SERVICING: Externally serviceable air valve, with a cartridge design for easy repairs and replacements.

UNIVERSAL PUMP: Matches relative dimension of main competitive brands. Direct replacement for existing installed pumps.

ABRASION RESISTANT: Optimized design manifolds and fluid paths reduce fluid speed and minimize wear caused by abrasion.

OIL & GAS APPLICATIONS

TANK CLEANING: Transfer of alkaline detergents, solvent degreasers, and caustic based cleaners.

TANK BOTTOM RECIRCULATION: Keep oil, paraffins, and natural gas liquids (NGLs) from separating in the tank. Transfer mixture from tank to tank to maintain consistency.

FLARE KNOCKOUT: Collecting natural gas liquids (NGLs) from the gas stream prior to flare. Transfer NGLs back into the process or into a storage tank.

SUMP TRANSFER: Clearing out sumps that contain rainwater, condensation and waste oil from well site.

GLYCOL HEAT TRACE: Circulation of Glycol to protect pipes and equipment from freezing.

CELLAR PUMP OUT: Clearing out drilling mud, fracking liquids from cellar or settling ponds.

TOTE AND DRUM UNLOADING: Chemical, fuel and oil unloading.



THE AIR VALVE MAKES THE DIFFERENCE

PIVOT SERIES Diaphragm Pumps incorporate a simple but effective air valve. A patented Frictionless Pivot Air Valve combined with the "Smooth-Start-Shifter" (3S) actuator provides a very reliable operation, with no stall and no icing, even in the toughest working conditions.

The air valve with no friction provides the fastest reciprocating action in the industry against a conventional spool or sliding block valves. This contributes to produce a smoother flow and reduced vibration when compared to many competitor AODD pumps.

